


Cables for security, telephone and fire detection systems, Al/Pet tape screen, halogen free.

CPR
EU 305/2011

Cca-s1a,d0,a1

1. Conductor
2. Insulation
3. Assembling
4. Screen
5. Drain wire
6. Sheath

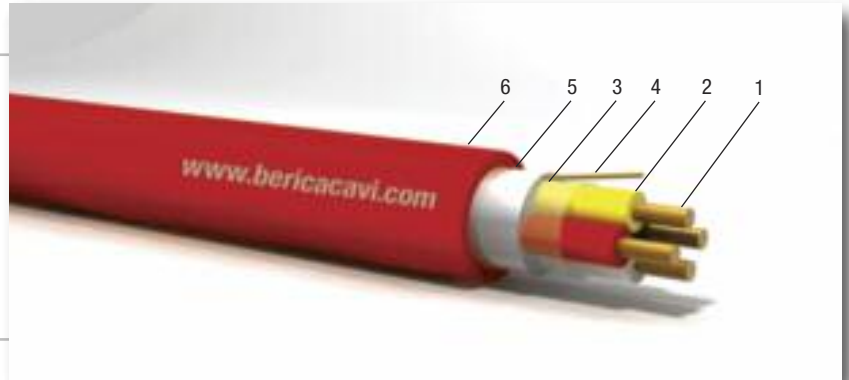

APPLICATION: Used for connections in intrusion detection systems, fire detection systems and telephone systems. In the most risky environments in the event of a fire, such as health facilities, entertainment venues and entertainment in general, gyms and sports centers. Hotels, guest houses, motels, villages, tourist residences - hotels. Schools of every level, grade and type. Exhibitors and / or retailers. Companies and offices with more than 300 people present; Libraries and archives, museums, galleries, exhibitions and exhibitions. Buildings intended for civil use, with a fire height of more than 24m. (Average Risk)

INSTALLATION: For fixed indoor installation in dry or wet environments and temporarily outdoor. They can be installed on platforms, pipes, conduits and similar systems. Not for direct burial.

FEATURES	DESCRIPTION	STANDARDS
Conductors :	annealed red copper (class 1)	
Insulation :	LSZH	
Cores colour code:	2x(red-blue), 4x(white-red-yellow-black), 2x2x(red/white - black/yellow); 4x2x(red/blue - white/yellow - white/green - white/brown)	
Assembling:	Pet tape	
Drain wire:	annealed red copper 1x0,50 mm	
Shield :	Al/Pet tape	
Sheath :	LSZH	CEI EN 50363
Sheath colour :	red RAL 3000	
Rated voltage U ₀ /U:	300/300 V	
Max voltage :	330 V	
Testing voltage :	2000 V	
Max working temperature :	70 °C	
Short-circuit temperature:	160 °C	
Min installation temperature:	0 °C	
Bending radius:	Ø x 8	

REGULATION (UE) 305/2011

System AVCP:	1+	EN 50575:2014 + A1:2016
Classification:	Cca - s1,d0,a1	UNI EN 13501-6
Cca:	Heat release and flame spread (FS ≤ 2m)	EN 50399
s1a:	Smoke transmittance ≥ 80% (TSP ≤ 50 m ² and SPR ≤ 0.25 m ² / s)	EN 50399
d0:	No flaming droplets	EN 50399
a1:	Gas acidity (Conductivity <2.5 ms / mm and pH> 4.3)	EN 50267-2-3
	Flame propagation (H ≤ 425 mm)	EN 60332-1-2
Printing :	BERICA CAVI S.P.A. ITALY J-H(ST)H BRANDMELDEKABEL Cca-s1a,d0,a1 Type, CE ,Year/Lot	

TYPE N° x mm	MEDIUM Ø OUTER mm	MEDIUM WEIGHT kg/km	PRODUCT CODE
1x2x0,80	4,40	31	B67C01C080
2x2x0,80	6,50	61	B67C02C080
4x0,80	5,00	45	B67C04080
4x2x,80	8,00	96	B67C04C080
1x2x1 sqmm	5,90	55	B67C01C100
2x2x1 sqmm	8,80	112	B67C02C100
1x2x1,5 sqmm	6,90	74	B67C01C150