


Fittings with short Spigot

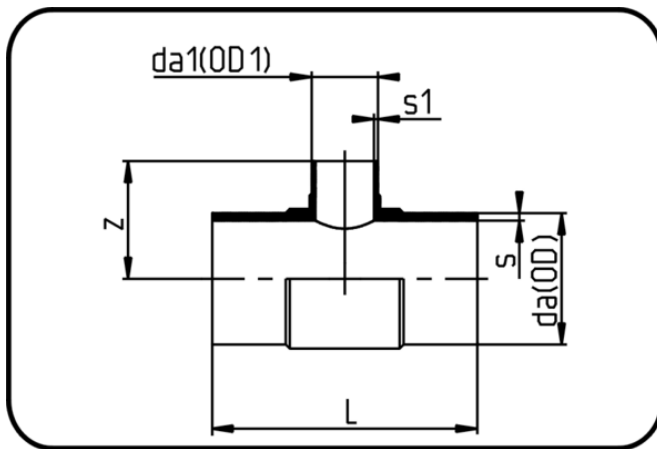

Code: 016

- Tee reduced
- short spigot
- injection moulded
- Butt-welding
- PE 100-RC black

Dimension	Code	Detail	da(OD) mm	da1(OD 1) mm	s mm	z mm	L mm	s1 mm	Weight
140/63	70.016.1463.17	140/63 SDR17 ISO S-8	140	63	8,3	120	300	3,8	1.38
140/75	70.016.1475.17	140/75 SDR17 ISO S-8	140	75	8,3	130	300	4,5	1.38
140/90	70.016.1490.17	140/90 SDR17 ISO S-8	140	90	8,3	130	300	5,4	1.409
140/110	70.016.1411.17	140/110 SDR17 ISO S-8	140	110	8,3	139	300	6,6	1.72
160/125	70.016.1612.17	160/125 SDR17 ISO S-8	160	125	9,5	150	325	7,4	2.22
180/63	70.016.1863.17	180/63 SDR17 ISO S-8	180	63	10,7	138	358	3,8	2.18
180/75	70.016.1875.17	180/75 SDR17 ISO S-8	180	75	10,7	140	360	4,5	2.2
180/110	70.016.1811.17	180/110 SDR17 ISO S-8	180	110	10,7	152	365	6,6	2.28
180/125	70.016.1812.17	180/125 SDR17 ISO S-8	180	125	10,7	161	358	7,4	2.56
225/125	70.016.2212.17	225/125 SDR17 ISO S-8	225	125	13,4	180	445	7,4	4.38
500/200	70.016.5020.17	500/200 SDR17 ISO S-8	500	200	29,7	405	900	11,9	48.74
90/32	70.016.9032.11	90/32 SDR11 ISO S-5	90	32	8,2	85	213	3	0.579
90/50	70.016.9050.11	90/50 SDR11 ISO S-5	90	50	8,2	90	210	4,6	0.589
110/32	70.016.1132.11	110/32 SDR11 ISO S-5	110	32	10	94	240	3	0.963
110/50	70.016.1150.11	110/50 SDR11 ISO S-5	110	50	10	100	240	4,6	0.965
125/63	70.016.1263.11	125/63 SDR11 ISO S-5	125	63	11,4	112	275	5,8	1.42
140/63	70.016.1463.11	140/63 SDR11 ISO S-5	140	63	12,7	120	302	5,8	1.88
140/75	70.016.1475.11	140/75 SDR11 ISO S-5	140	75	12,7	130	302	6,8	1.85
140/90	70.016.1490.11	140/90 SDR11 ISO S-5	140	90	12,7	130	305	8,2	1.967
140/110	70.016.1411.11	140/110 SDR11 ISO S-5	140	110	12,7	141	305	10	2.28
160/125	70.016.1612.11	160/125 SDR11 ISO S-5	160	125	14,6	150	325	11,4	2.82
180/63	70.016.1863.11	180/63 SDR11 ISO S-5	180	63	16,4	139	358	5,8	3.16
180/75	70.016.1875.11	180/75 SDR11 ISO S-5	180	75	16,4	144	362	6,8	3.18

Dimension	Code	Detail	da(OD) mm	da1(OD 1) mm	s mm	z mm	L mm	s1 mm	Weight
180/125	70.016.1812.11	180/125 SDR11 ISO S-5	180	125	16,4	166	362	11,4	3.36
225/125	70.016.2212.11	225/125 SDR11 ISO S-5	225	125	20,5	178	456	11,4	6.4
500/200	70.016.5020.11	500/200 SDR11 ISO S-5	500	200	45,4	405	900	18,2	64